



SPECIALTY ENVIRONMENTAL CHEMICALS AND EQUIPMENT

# CARBONIL

## DESCRIPTION:

Regular strength hydrocarbon encapsulation chemical agent. Carbonil chemically binds with hydrocarbons and other oil-based chemicals. This product greatly reduces LEL levels within 12 hours of application (60% reduction within 30 minutes usually). Excellent for use as a pre-treatment for tanks needing entry with high LEL. Moderate cleaning capabilities. Contains deodorant. Moderate foaming capabilities.

## PRODUCT USES & APPLICATIONS

- Tank Cleaning
- LEL Control
- Hydrocarbon Stripping
- Spill Control
- Fire Prevention

## APPLICATION INSTRUCTIONS

Dilution Rate	1:2 to 1:5 with water
Set Time	30 minutes to 24 hours
Temperature	Warm water helps stripping

**Special Instructions:** For scrubbing applications, make sure product has been treated with de-foaming agent.


## HAZARDOUS INFORMATION

Specific Hazard	Eye and skin irritant
Flash Point (°F)	Above 220°
Biodegradability	Excellent
pH	10.5 to 11.5
Unusual Hazards	None

## PACKAGING INFORMATION

Available Quantities	5, 30, 55 and bulk quantities
Packaging Material	Poly
Other Information	Do not let product freeze.

## BENZENE PPM LEVELS

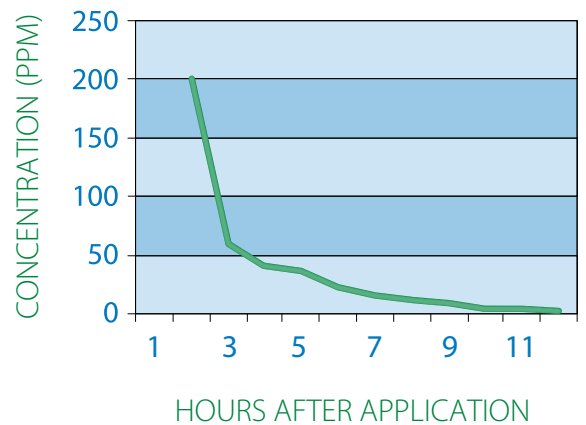

## LEL LEVEL %

